
66QL6-BDX

645-670 Watt

85 ± 5% Bifaciality

BIFACIAL MODULE

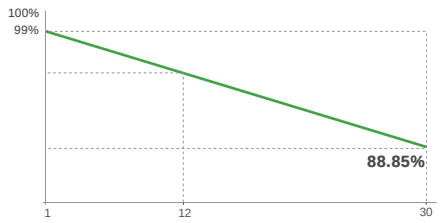

12 Year	30 Year	1%	0.35%
Product Warranty	Linear Power Warranty	First-year Degradation	Annual Degradation Over 30 Years

- IEC61215:2021 / IEC61730:2023
- ISO9001:2015: Quality Management System
- ISO14001:2015: Environment Management System
- ISO45001:2018: Occupational health and safety management systems

JKM645-670N-66QL6-BDX-SafetyKing-F3-EN

Pallet Dimensions	2412 × 1140 × 1254 mm
[illegible]	36 pcs/pallet, 72 pcs/stack, [illegible] 576 pcs/ 40'HQ Container

Maximum Power - Pmax [Wp]	
Maximum Power Voltage - Vmp [V]	
Maximum Power Current - Imp [A]	
Open-circuit Voltage - Voc [V]	
Short-circuit Current - Isc [A]	
Module E ciency STC [%]	
	0 ~ +3 %
	-0.26 %/°C
	-0.24 %/°C
	0.046 %/°C

STC: Irradiance 1000W/m², Cell Temperature 25°C, AM=1.5

Maximum Power - Pmax [Wp]*	
Maximum Power Voltage - Vmp [V]	
Maximum Power Current - Imp [A]	
Open-circuit Voltage - Voc [V]	
Short-circuit Current - Isc [A]	

BNPI: Irradiance: Front 1000W/m², Rear 135W/m², Cell Temperature 25°C, AM=1.5.
*Power measurement tolerance: ± 3%

Level T_{98} ≤ 70	-40 °C ~ +70 °C
	1500 VDC (IEC)
	35 A

Voltage

Voltage (V)